


## DS-KD-KK/S KD8 Series Pro Modular Door Station

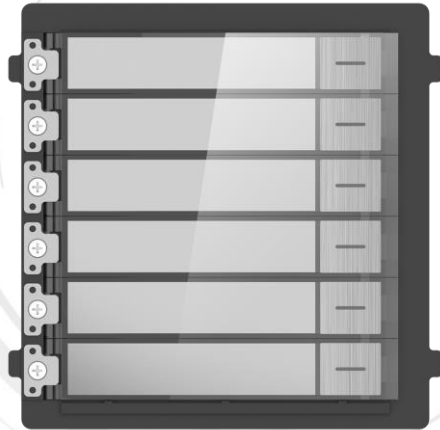

- Nametag module of modular door station
- Six nametag buttons calling Design For easier calls
- IP65 protection level
- Backlight compensation behind the nametag buttons
- Easy to use and extend
- Stainless Steel high quality material

## ▪ Specification



System parameters	
Operation system	Linux
ROM	/
RAM	/
Processor	Embedded high performance processor
Display parameters	
Screen size	/
Operation method	/
Type	/
Resolution	/
Video parameters	
Lens	/
Resolution	/
FOV	/
Wide dynamic range (WDR)	/
Supplement light	/
Video compression standard	/
Audio parameters	
Audio input	/
Audio compression standard	/
Audio output	/
Audio compression bitrate	/
Audio quality	/
Volume adjustment	/
Capacity	
User capacity	/
Face capacity	/
Card capacity	/
Linked network camera capacity	/
Network parameters	
Network protocol	TCP/IP, RTSP
Wi-Fi	/
Bluetooth	/
3G/4G	/
Device interfaces	
Alarm input	/
Network interface	1 RJ-45, 10/100 Mbps self-adaptive
TAMPER	/
Exit button	/
RS-485	2
USB	/
Wiegand	/
TF card	/
Alarm output	/

Lock control	/
Door contact input	/
<b>General</b>	
Button	6
Installation	Flush mounting, surface mounting
Indicator	/
Weight	Net weight: 265 g Gross weight: 529 g
Protective level	IP65, IK07
Working temperature	-40 °C to 55 °C(-40 °F to 131 °F)
Working humidity	10% to 95%
Dimension (W × H × D)	98.5 mm × 100 mm × 34.2 mm (3.87" × 3.95" × 1.33")
Battery	/
Power supply	12 VDC, powered for other module
Application environment	Outdoor
Power consumption	0.8W

▪ **Available Model**

- DS-KD-KK/S
- DS-KD-KK/S/PROFESSION
- DS-KD-KK/S/DS-KD-KK/S/2
- DS-KD-KK/S/DS-KD-KK/S/3
- DS-KD-KK/S/DS-KD-KK/S/4
- DS-KD-KK/S/RAL7016/DS-KD-KK/S/1
- DS-KD-KK/S/RAL7016/DS-KD-KK/S/2
- DS-KD-KK/S/RAL7016/DS-KD-KK/S/3
- DS-KD-KK/S/RAL7016/DS-KD-KK/S/4
- DS-KD-KK/S(USA-STD)

▪ **Dimension**







Unit:mm [inch]

SCALE 1:1

▪ **Accessory**

▪ **Optional**

<p><b>DS-KD-ACW2</b> 2nd Video Intercom Brackets</p>	<p><b>DS-KD-ACW3</b> 2nd Video Intercom Brackets</p>	<p><b>DS-KD-ACF2</b> 2nd Video Intercom Brackets</p>	<p><b>DS-KD-ACF3</b> 2nd Video Intercom Brackets</p>	
				
<p><b>DS-KABD8003-RS2</b> Rain Shield of Module Door Station</p>	<p><b>DS-KABD8003-RS3</b> Rain Shield of Module Door Station</p>	<p><b>DS-KD-ACF2/S</b> 2nd Video Intercom Brackets</p>	<p><b>DS-KD-ACF3/S</b> 2nd Video Intercom Brackets</p>	<p><b>DS-KD-ACW2/S</b> 2nd Video Intercom Brackets</p>
				
<p><b>DS-KD-ACW3/S</b> 2nd Video Intercom Brackets</p>	<p><b>DS-KD8003-IME1(B ) /S</b> KD8 Series Pro Modular Door Station</p>	<p><b>DS-KD8003-IME1(B ) /NS</b> KD8 Series Pro Modular Door Station</p>	<p><b>DS-KD8003Y-IME2/ S</b> Two wire main unit</p>	<p><b>DS-KD8003Y-IME2/ NS</b> Two wire main unit</p>
				



**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

