




RG 25GBASE Series Optical Transceivers

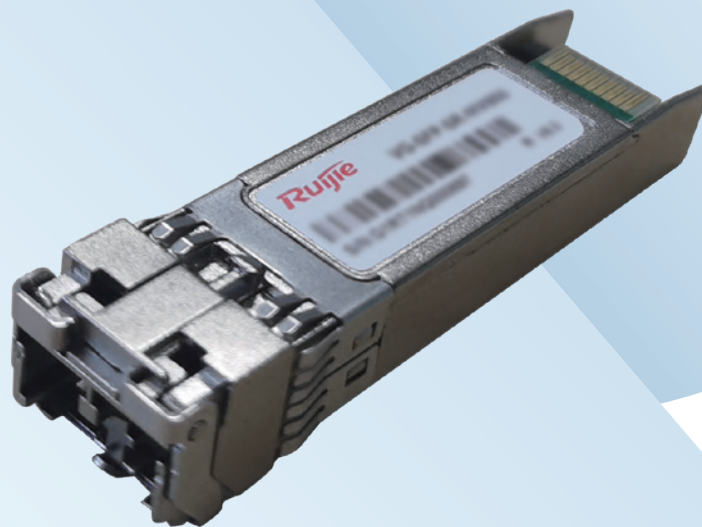

Scan QR Code
For More Enquiry

Ruijie

| Product Pictures



Appearance of VG-SFP-AOCXM



Appearance of 25G Module

| Product Overview

As an industry-leading ICT infrastructure and industry solution provider, Ruijie offers customers a wide variety of high-density and low-power 25G optical transceivers. They are applicable to data centers, high-performance computing (HPC) networks, and enterprise core and aggregation layers, enabling cost-effective and efficient high-speed interconnection between data center servers and switches.

VG-SFP-SR-MM850 Module

The VG-SFP-SR-MM850 is aligned to IEEE 25GBASE-SR optical specifications and supports a link length of up to 100 m over an OM4 multimode fiber (MMF) or 70 m over an OM3 MMF with a Duplex LC connector. It adopts the SFP28 form factor and operates at a wavelength of 850 nm. The transceiver conforms to SFF-8432, SFP+ MSA, IEEE802.3by and RoHS standards.

VG-SFP-LR-SM1310 Module

The VG-SFP-LR-SM1310 is aligned to IEEE 25GBASE-LR optical specifications and supports a link length of up to 10 kilometers over a single-mode fiber (SMF) with a Duplex LC connector. It adopts the SFP28 form factor and operates at a wavelength of 1310 nm. The transceiver conforms to SFF-8432, SFF-8431, SFP+MSA, IEEE 802.3cc, and RoHS standards.

VG-SFP-AOCXM Cable

SFP28 25G to SFP28 40G active optical cables (AOCs) are suitable for short-distance transmission and offer a flexible way to connect within and across racks. AOCs are much thinner and lighter than copper cables, which makes cable management easier. AOCs enable efficient system airflow, which is crucial in high-density racks. There are three models available: VG-SFP-AOC5M and VG-SFP-AOC7M in a length of 5 meters, and 7 meters respectively.

Product Features

- Hot swapping, allowing for simplified maintenance
- High reliability and low power consumption, allowing for prolonged service life
- Compliance with RoHS, REACH, and FDA standards

Product Specifications

Optical Transceiver Specifications

Model	VG-SFP-SR-MM850	VG-SFP-LR-SM1310
Data rate	25.78 Gbps	
Form factor	SFP28	
Connector type	Duplex LC	
Cable type	MMF	SMF
Fiber end face finish type	Ultra Physical Contact (UPC)	
Transmitter type	VCSEL	DFB
Laser type	PIN	
Reach	OM3: 70 m (229.66 ft.) OM4: 100 m (328.08 ft.)	10 km (32,808.40 ft.)
Bit error ratio (BER)	5.00E-15	
Data diagnosis-capable (DDM/DOM)	Yes	
Power consumption	1.5 W	

Transmitter Optical Parameters

Model	VG-SFP-SR-MM850	VG-SFP-LR-SM1310
Wavelength (nm)	(840, 860)	(1295, 1325)
Max. transmit power (AVG)	2.4 dBm	2 dBm

Model	VG-SFP-SR-MM850	VG-SFP-LR-SM1310
Min. transmit power (AVG)	-8.4 dBm	-7 dBm
Min. extinction ratio	2 dB	3 dB

Receiver Optical Parameters

Model	VG-SFP-SR-MM850	VG-SFP-LR-SM1310
Receive sensitivity (OMA)	< -10.3 dBm	< -13.3 dBm
Overload optical power (AVG)	2.4 dBm	2 dBm

Environment and Reliability

Model	VG-SFP-SR-MM850	VG-SFP-LR-SM1310
Operating temperature	0°C to 70°C (32°F to 158°F)	
Operating humidity	10% RH to 90% RH	
Storage temperature	-40°C to +85°C (-40°F to +185°F)	
Storage humidity	10% RH to 90% RH	

Dimensions and Weight

Model	VG-SFP-SR-MM850	VG-SFP-LR-SM1310
Dimensions (W x D x H)	56.5 mm x 13.5 mm x 8.5 mm (2.22 in. x 0.51 in. x 0.33 in.)	
Weight	50 g (0.11 lbs.)	

AOC Specifications

Model	VG-SFP-AOC5M	VG-SFP-AOC7M
Data rate	25.78 Gbps	
Form factor	SFP28	
Connector type	SFP28 to SFP28	

Model	VG-SFP-AOC5M	VG-SFP-AOC7M
Data diagnosis-capable (DDM/DOM)	Yes	
Length	5 m (16.40 ft.)	7 m (22.97 ft.)
Transceiver type	Active	

Order Information

Model	Description
VG-SFP-SR-MM850	25G SR module, SFP28 form factor, LC, 850 nm, 100 m (328.08 ft.) over MMF
VG-SFP-LR-SM1310	25G LR module, SFP28 form factor, LC, 1310 nm, 10 km (32,808.40 ft.) over SMF
VG-SFP-AOC5M	25G SFP28 AOC cable, 5 m (16.40 ft.)
VG-SFP-AOC7M	25G SFP28 AOC cable, 7 m (22.97 ft.)



Ruijie Networks Co., Ltd.

For more information, visit www.ruijienetworks.com or call 86-400-620-8818.